


SHARPE[®] VALVES

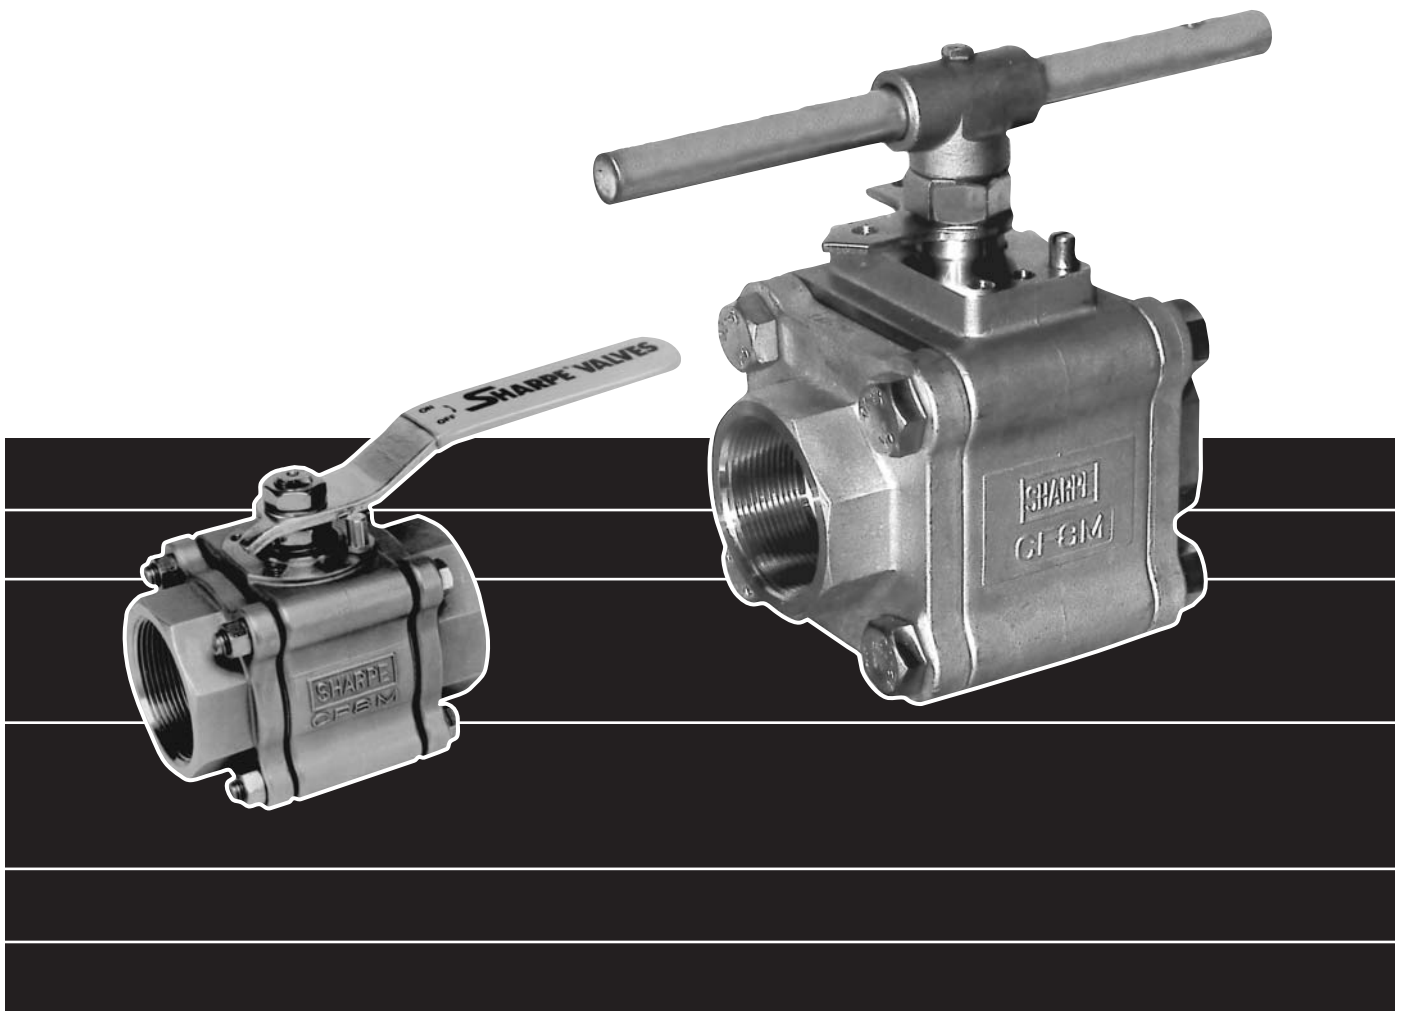

SERIES FS 84/99
FIRE SAFE HIGH PERFORMANCE
3 PIECE BALL VALVES

SHARPE® FIRE SAFE API 607 4th EDITION HIGH PERFORMANCE VALVES

Sharpe® Series FS 84 /99 Standard and Full Port Ball Valves offer as standard features, advantages that other valve manufacturers offer only as costly extras. This is the Sharpe® advantage.

3-Piece Design

In-line serviceable swing-out center section allows easy access to internal valve components without disturbing alignment of pipe. Functions as both valve and union.

Bottom Entry Live Loaded Stem

Self adjusts with pressure and temperature fluctuations. Blow-out proof anti-static design helps prevent accidents and injuries.

Live Loaded High Cycle Stem

Two belleville washers in manual valve and four belleville washers in actuated valve allow the valves to perform exceptionally during high cycling and in control applications.

Fully Encapsulated Body Seals

Allows valve ends to be welded in line without disassembly, saving costly labor time. Also prevents seal ruptures in high pressure or steam applications.

Integral Mounting Pad

Ideal for actuation. Centering lip feature assures precise alignment of bracket, stem and coupler. Actuators may be retrofitted on existing series FS 84/99 without disruption of line integrity. Allows for secondary containment unit to be added when necessary.

Lockable Handle

All Sharpe® Series FS 84/99 Valves meet OSHA standards with locking device. Keeps valves from being opened or closed accidentally.

Slotted Seat Design

Relief slots help equalize body pressure, reduce torque and assure leak-tight sealing. Seats also provide a wiping action that cleans ball and seats each time valve is cycled.

Choice of Seats

A wide variety of seat materials are readily available for the most demanding applications, including Nova*, PEEK, TFE, RTFE, and TFM™. Stem packing and body seals are Grafoil.

Variety of End Combinations

A wide choice of optional end connections are available including, but not limited to threaded ends, socket weld ends, butt weld ends, flush bottom tank pads, grooved ends and 150#/300# flanges.

Floating Ball Design

Precision engineered solid stainless steel ball with relief hole in stem slot prevents build up of cavity pressure while valve is in open position. Bi-directional floating ball seats downstream reducing torque and guaranteeing a bubble-tight shut off.

Encapsulated Body Bolts


Heavy duty stainless steel bolting is protected from outside environment assuring valve integrity.

Traceability

Heat numbers are provided on all valve bodies and ends. CMTR's (certified mill test reports) are available upon request.

Fire Safe API 607 4th Edition

A metal centering ring is part of the end cap that fits into the body (tongue and groove) and aligns the pipe end with the ball. During fire, the seat is destroyed and the ball moves downstream where it makes contact with a special shaped end that provides a secure fire tight seal.

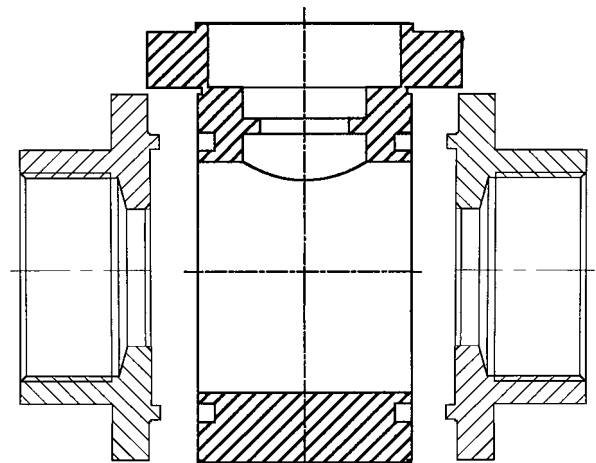


* Carbon and Graphite Filled TFE

** TFM is a registered trademark of Dyneon, LLC


SERIES FS 84/99

VALVE PARTS AND IDENTIFICATION

FS84
1/4", 3/8", 1/2"



FS 84 3/4" - 2-1/2"
FS 99 1/2" - 2"

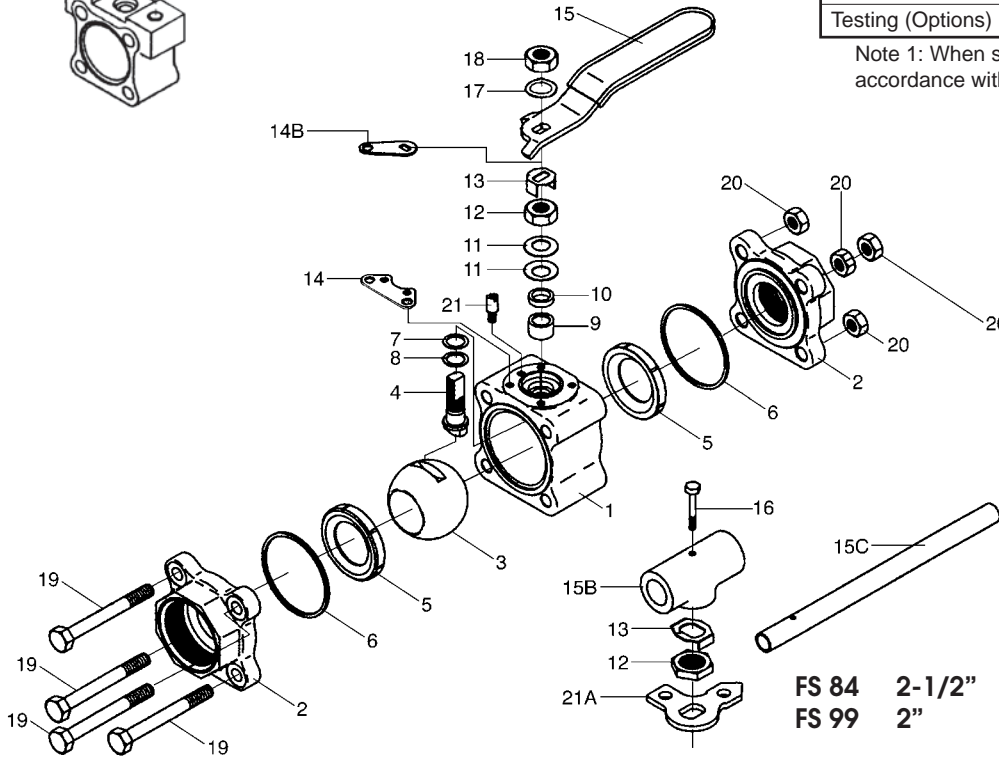

FS 84 2-1/2"
FS 99 2"

APPLICABLE STANDARDS

Body Wall Thickness	ASME B16.34
SW & Threaded Ends	ASME B16.11
Butt-weld Ends	ASME B16.25
Flange Dimensions	ASME B16.5
Basic Design	ASME B16.34 (note 1)
Fire Test	API 607 4th Edition
Testing (Options)	ASME B16.34 API 598

Note 1: When specified, valves can be furnished in accordance with ASME B16.34 requirements.


PART NO.	PART	QTY.	MATERIAL
1	Body	1	316 Stainless Steel Alloy 20 Carbon Steel Hastelloy C Monel ASTM A351 CF8M ASTM A351 CN7M ASTM A216 WCB ASTM A494 Type CW-12MW ASTM A494 GR M35-1
2	Pipe Ends	2	316L Stainless Steel Alloy 20 Carbon Steel Hastelloy C Monel ASTM A351 CF3M ASTM A351 CN7M ASTM A216 WCB ASTM A494 Type CW-12MW ASTM A494 GR M35-1
3	Ball	1	316 Stainless Steel Monel Alloy 20 Hastelloy C
4	Stem	1	316 Stainless Steel Hastelloy C Alloy 20 17-4PH (Option) Monel
5	Valve Seat	2	TFE Nova* Reinforced TFE TFM (Super TFE)
6	Body Seal	2	Grafoil
7	Thrust Bearing	1	Nova*
8	Thrust Bearing	1	PEEK
9	Stem Packing	1	Grafoil
10	Gland Packing	1	Stainless Steel
11	Belleville Washer	2	Stainless Steel
12	Packing Nut	1	Stainless Steel

PART NO.	PART	QTY.	MATERIAL
13	Lock Tab	1	Stainless Steel
14	Lower Lock Latch	1	Stainless Steel
14B	Upper Lock Latch Bolt	1	Stainless Steel
14C	Latch Bolt	1	Stainless Steel
15	Handle 1/4"-2" Std. Port 1/2"-1-1/2" F. Port	1	Stainless Steel
15B	Wrench Block	1	Stainless Steel
15C	Wrench 2-1/2" Std. Port 2" Full Port	1	Cad Plate Carbon Steel
16	Hex Head Bolt	1	Stainless Steel
17	Lock Washer	1	Stainless Steel
18	Handle Nut (1/4"-2")	1	Stainless Steel
19	Body Bolts	4	Stainless Steel
20	Nuts	4	Stainless Steel
21	Stop Pin (1/4"-1/2")	1 2	Stainless Steel Stainless Steel
21A	Stopper	1	Stainless Steel

* Nova: Carbon and Graphite Filled TFE

SERIES FS 84/99

DIMENSIONS

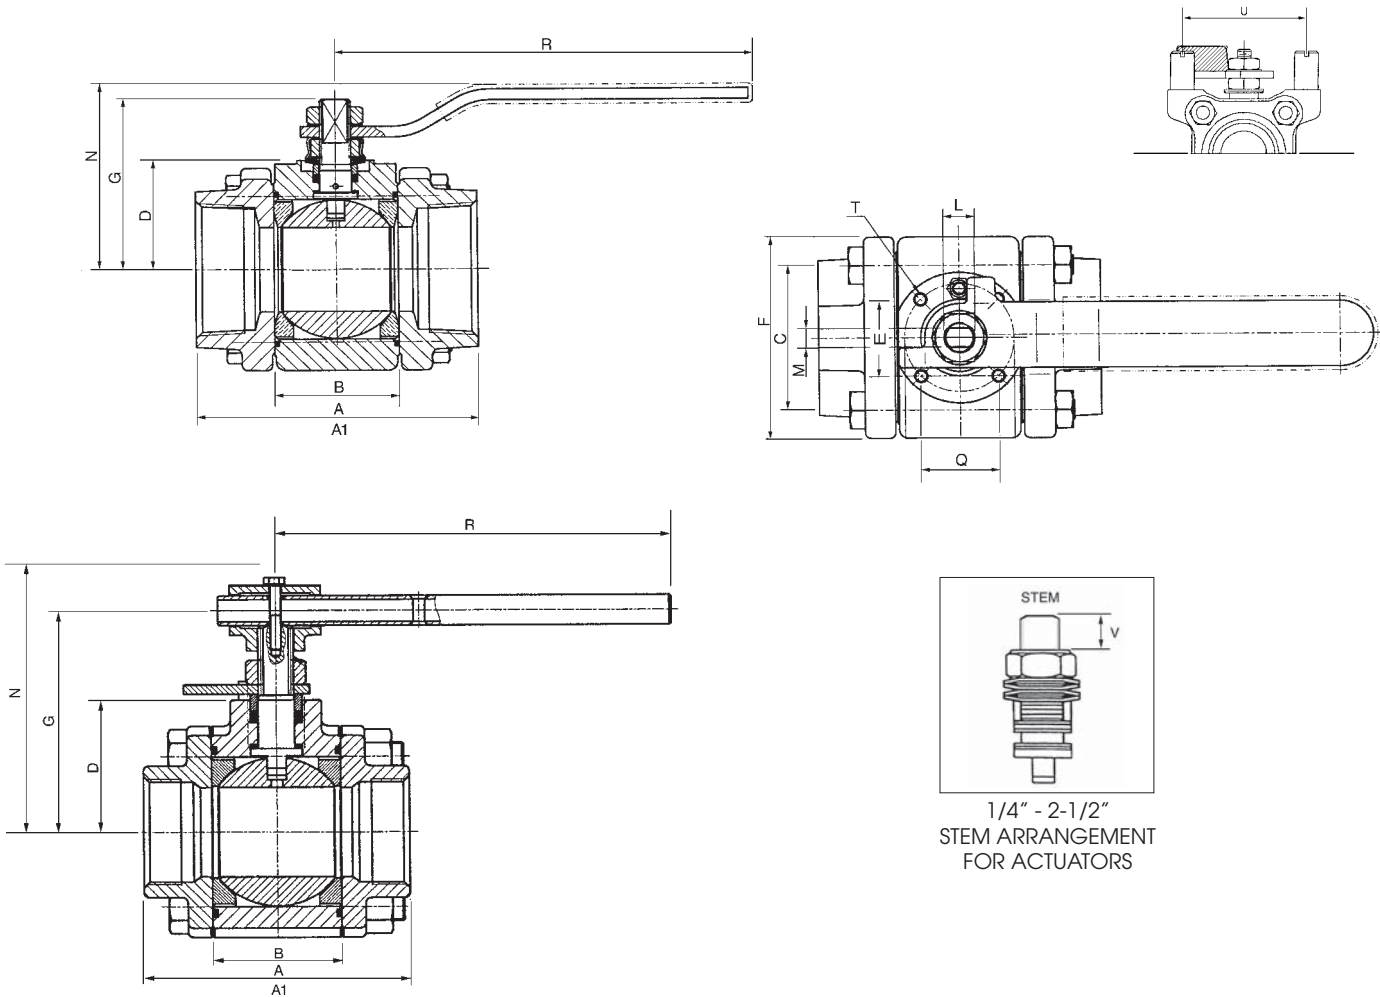

SERIES FS84 - Standard Port

SIZE	A	A1(BW)	B	C	D	E	F	G	L	M	N	Q	R	T	U	V
1/4"	2.54	2.62	.813	1.25	.939	-	1.75	1.50	3/8"-24 UNF	.22	1.76	-	4.62	1/4"-20 UNC	1.90	.28
3/8"	2.54	2.62	.813	1.25	.939	-	1.75	1.50	3/8"-24 UNF	.22	1.76	-	4.62	1/4"-20 UNC	1.90	.28
1/2"	2.54	2.62	.813	1.25	.939	-	1.75	1.50	3/8"-24 UNF	.22	1.76	-	4.62	1/4"-20 UNC	1.90	.28
3/4"	2.78	2.87	.969	1.50	1.24	1.00	2.05	1.59	3/8"-24 UNF	.22	1.87	1.00	4.50	M5	-	.28
1"	3.68	3.72	1.25	1.75	1.51	1.18	2.42	2.19	7/16"-20 UNF	.30	2.40	1.18	5.75	M5	-	.30
1-1/4"	4.22	4.24	1.63	2.00	1.65	1.18	2.70	2.38	7/16"-20 UNF	.30	2.70	1.18	5.75	M5	-	.30
1-1/2"	4.55	4.58	1.91	2.25	1.71	1.38	3.16	2.88	9/16"-18 UNF	.35	3.16	1.38	7.00	M6	-	.42
2"	5.00	5.03	2.22	2.62	1.87	1.38	3.56	3.06	9/16"-18 UNF	.35	3.35	1.38	7.00	M6	-	.42
2-1/2"	5.86	5.86	2.86	3.35	2.92	2.75	4.57	4.56	M20	.55	5.58	1.25	10.00	M8	-	.55

SERIES FS99 - Full Port

SIZE	A	A1(BW)	B	C	D	E	F	G	L	M	N	Q	R	T	V
1/2"	2.78	2.87	.969	1.50	1.24	1.00	2.05	1.59	3/8"-24 UNF	.22	1.87	1.00	4.50	M5	.28
3/4"	3.68	3.72	1.25	1.75	1.51	1.18	2.42	2.19	7/16"-20 UNF	.30	2.40	1.18	5.75	M5	.30
1"	4.22	4.24	1.63	2.00	1.65	1.18	2.70	2.38	7/16"-20 UNF	.30	2.70	1.18	5.75	M5	.30
1-1/4"	4.55	4.58	1.91	2.25	1.71	1.38	3.16	2.88	9/16"-18 UNF	.35	3.16	1.38	7.00	M6	.42
1-1/2"	5.00	5.03	2.22	2.62	1.87	1.38	3.56	3.06	9/16"-18 UNF	.35	3.35	1.38	7.00	M6	.42
2"	5.86	5.86	2.86	3.35	2.92	2.75	4.57	4.56	M20	.55	5.58	1.25	10.00	M8	.55

SERIES FS 84

PERFORMANCE DATA


VALVE SIZE	FLOW COEFF. Cv	EQUIVALENT LENGTH OF SCH. 40 PIPE FEET	APPROX. WEIGHT	PORT SIZE
1/4"	8	1.9	1.20	.44
3/8"	8	1.9	1.20	.44
1/2"	8	1.9	1.20	.44
3/4"	12	6.3	1.70	.56
1"	32	3.1	3.00	.81
1-1/4"	46	6.3	4.00	1.00
1-1/2"	80	4.3	6.00	1.25
2"	120	7.5	8.00	1.50
2-1/2"	240	5.00	25.00	2.00

SERIES FS 99


PERFORMANCE DATA

VALVE SIZE	FLOW COEFF. Cv	EQUIVALENT LENGTH OF SCH. 40 PIPE FEET	APPROX. WEIGHT	PORT SIZE
1/4"	8	.9	1.8	.44
3/8"	8	.9	1.8	.44
1/2"	38	1.4	1.8	.56
3/4"	71	1.0	3.0	.81
1"	110	1.9	5.7	1.00
1-1/4"	230	2.1	6.2	1.25
1-1/2"	350	2.1	7.5	1.50
2"	600	2.1	29.0	2.00

SEAT PRESSURE/TEMPERATURE RATING SERIES FS84

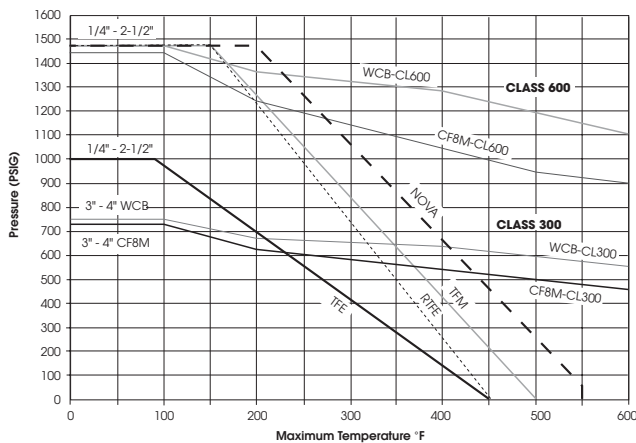


SEAT PRESSURE/TEMPERATURE RATING SERIES FS99

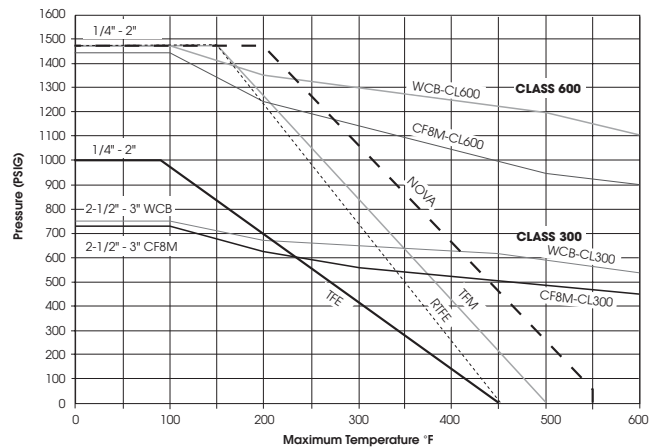

SHARPE® VALVES

Choose from our full line of high quality valves and actuators to meet your needs.

Whatever your flow control requirements are, Sharpe® has the right products and service to meet your needs today.



HOW TO ORDER

VALVE SIZE	VALVE SERIES	BODY & ENDS	BALL & STEM	SEAT	SEAL	ENDS	OPTIONS
1/4" 3/8" 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 2-1/2"	FS 84 (Std. Port) FS 99 (Full Port)	4 = Carbon Steel 6 = Stainless Steel 2 = Alloy 20 3 = Monel 5 = Hastelloy C	6 = 316 S/S 2 = Alloy 20 3 = Monel 5 = Hastelloy C	T = TFE R = Reinforced TFE N = Nova M = TFM™	G = Grafoil	TE = Threaded Ends (NPT) TEB = Threaded Ends (BSPT) BW = Butt Weld Sch. 5, 10, 40, & 80 SW = Socket Weld FBE = Flush Bottom Tank Flange	X = Oxygen Service OH = Oval Handle F = Fugitive Emissions Certified ANSI 593.00.01 E = Extended Stem L = Lockable Extended Stem D = Leak Detection Stem GO = Gear Operator 7 = 17-4PH Stem A = Nace



SHARPE® VALVES

A DIVISION OF **Sharon** PIPING & EQPT., INC.

Toll-Free 1-877-7SHARPE
E-Mail: sharpediv@aol.com
www.sharpevalves.com

504 West Wrightwood Ave.
 Elmhurst, IL 60126